



LEGEND X




LEGEND X 900

Cod. **02029305** EAN **8422248068635**

- Electronic Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 5 extraction levels, 4 + 1 **TURBO**
- 1st speed silent mode**
- Extraction power (according to UNE/EN 61591): **648m³/h** - 200m³/h
- Maximum air flow (free outlet): 1000m³/h
- Sound power (Reg.(EU) n°65/2014): 40dB(A)**, maximum: 64dB(A)
- BRUSHLESS** motor. Ultra silent. Maximum energy consumption **130W**
- High efficiency Led lighting, adjustable intensity**
- Easy-to-install system
- Dishwasher-washable filters
- Stainless steel finishing
- Max. Pressure: 470 Pa
- 150/125 mm outlet diameter
- Energy Class: A**

► **Accessories (not included)**

Active charcoal filterCod. 02859398 / EAN 8422248075497.....
 Check valveCod. 02832004 / EAN 8422248480499.....
 Top tube.....Cod. 02861301 / EAN 8422248031073.....

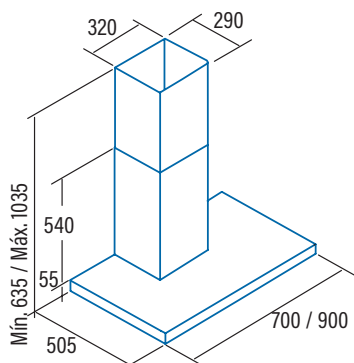

Code	02029305
EAN	8422248068635
Model	LEGEND 900 X
Type	Box
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	42,1
EEL class (Energy Efficiency Class)	A
FDE (Fluid Dynamic Efficiency)	31,7
FDE class (Fluid Dynamic Efficiency Class)	A
LE (Lighting Efficiency) (lux/W)	36
LE class (Lighting Efficiency Class)	A
GFE (Grease Filtering Efficiency)	78,5
GFE Class (Grease Filtering Efficiency class)	C
Air flow at minimum speed (m ³ /h)	200
Air flow at maximum speed (m ³ /h)	524
Air flow at intensive speed (TURBO) (m ³ /h)	648
Sound Power Level at minimum speed (dB)	40
Sound Power Level at maximum speed (dB)	64
Sound Power Level at intensive speed (TURBO) (dB)	67
Po (Power Consumption in off mode) (W)	0,41
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	0,8
EEL (Energy Efficiency Index)	44,8
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	390,3
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	329
WBEP (Electric Power Input at Best Efficiency Point) (W)	112,6
WL (Nominal Power Consumption of Lighting system) (W)	7
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	252
External Dimensions	
Width (mm)	900
Depth (mm)	505
Total max height (mm)	1035
Total min height (mm)	635
Outlet Diameter (mm)	150/125
Characteristics	
Motor	BTDCA
Extraction Levels	4+1
Motor Maximum Power Consumption	130
Maximum Pressure	455
Intensive Speed (TURBO) Pressure	470
Control Type	NL5i
Automatic shut-down timer	√
Electronic Filter Saturation Indicator	√
Filter Type	Metallic
Anti-grease Filter Number	3
Inner Shield	-
Lighting	
Light Type	EcoLed
Adjustable Intensity Lighting	√
N° of Lamps	2
Installation	
Minimum height distance to a electric worktop hob (mm)	650
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	√
Electric Connection	
Total Rush Power (W)	137
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS II
Plug	EU - 2 pins
Accessories	
Upper Decorative tube Extension	02861301
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	02832004
MAX PRO Metal Filter	02800917
Metal Filter	02800200*
DUAL Filter (metal + active charcoal)	02800918
Active Charcoal Filter	02859398
Noiseless Flexible Duct	02893002